


HEAT EXCHANGERS OIL - AIR

PILAN
intercambiadores de calor

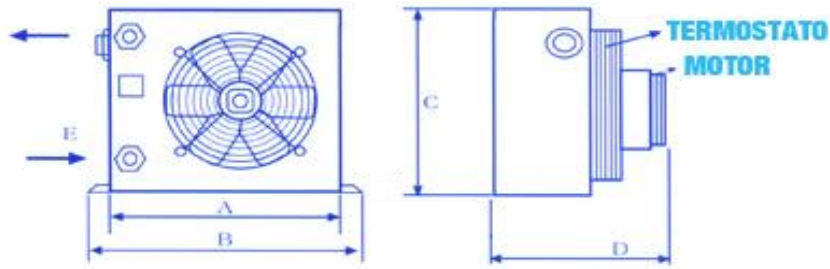

Reference	Flow Max.	A	B	C	D	E	(Kw)	Voltage	Ø	Surface
TP-10	50	400	440	290	200	3/4"	10w	220v	250	3,4m ²
TP-15	80	490	525	355	255	3/4"	16w	220v	300	5,5m ²
TP-20	100	590	650	425	425	1"	185w	220v	350	12m ²
TP-25	130	660	710	470	450	1"	185w	220v	400	16m ²

Reference	Flow Max.	A	B	C	D	E	(Kw)	Voltage	Ø	Surface
TP-10V	50	400	440	290	200	3/4"	10w	12v	250	3,4m ²
TP-15V	80	490	525	355	255	3/4"	16w	12v	300	5,5m ²

Reference	Flow Max.	B	C	D	E	F	(Kw)	Voltage	Ø	Surface
TP-10 2V	50	400	440	290	200	3/4"	10w	24v	250	3,4m ²
TP-15 2V	80	490	525	355	255	3/4"	16w	24v	300	5,5m ²

Reference	Flow Max.	B	C	D	E	F	(Kw)	Voltage	Ø	Surface
TP-20 400V	100	590	650	425	425	1"	185w	400v	350	12m ²
TP-25 400V	130	660	710	470	450	1"	185w	400v	400	16m ²